


**7 Chan Mux Distribution Board**

**VDU – Terminal – Terminal emulator**


**VISUAL DISPLAY**

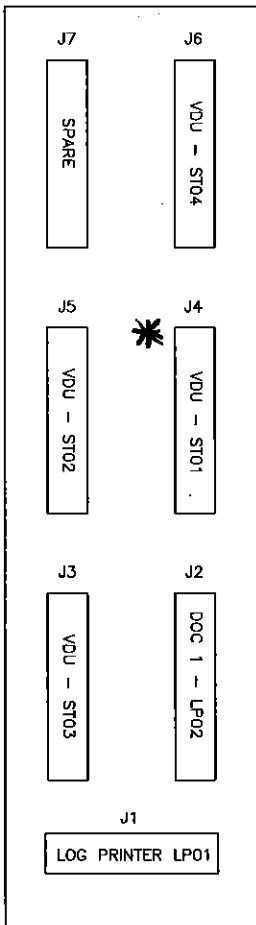

**MULTIPLEXER**

**DISPLAY**

**J4**

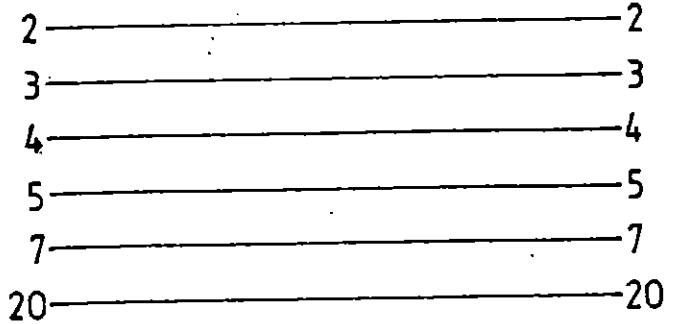

**The VDU / Terminal needs to emulate an ADDS Viewpoint Terminal**

Baud Rate 9600  
 Bits 7  
 Parity Odd  
 Stop Bits 1  
 Data Flow Control – None

**Serial Printer (Lexmark 2400/2500) - Plug into J1 port. Referred to as LP01 in system.**

Mux Connection	Printer
J1 - 2 -----	2
J1 - 3 -----	3
J1 - 4 ----+	+---- 4
	---- 6
J1 - 5 ----+	+---- 8
J1 - 7 -----	7
J1 - 20 -----	20

Baud 4800, Bits 7, Parity Odd, Sop Bits 1, Flow Control DTR